

10/13/99
JCS94 U.S. 8-979

J. PATTERSON
WADDEY, JR.
WARD D. LANQUIST, JR.
JAN WAYNE BEAVERS
C. GARVIN, JR.*
A. K. THOMAS
EMILY A. SHOUSE
DAVID B. PIEPER*
LARRY W. BRANTLEY*
RICHARD S. MYERS, JR.*

REGISTERED PATENT AGENT
HAROLD W. HILTON

*LICENSED IN A STATE
OTHER THAN TENNESSEE

LAW OFFICES
WADDEY & PATTERSON
A PROFESSIONAL CORPORATION
SUITE 2020, BANK OF AMERICA PLAZA
414 UNION STREET
NASHVILLE, TENNESSEE 37219
615-242-2400
FAX 615-242-2221

October 13, 1999

PTO
PATENTS, TRADEMARKS,
COPYRIGHTS, TRADE DISPUTES,
UNFAIR COMPETITION,
COMPUTER LAW, LICENSING,
AND RELATED LITIGATION
ALABAMA OFFICE
SUITE 302, AMSOUTH CENTER
200 CLINTON AVENUE
P O BOX 18485
HUNTSVILLE, ALABAMA 35804
256-535-4400
FAX 256-535-4402

Writer's Direct E-mail Address:
rsm@iplawgroup.com

Assistant Commissioner for Patents
Box New Patent Application
Washington, DC 20231

VIA EXPRESS MAIL LABEL
NUMBER EL428170884
ATTORNEY'S DOCKET NO.: N-4441

Dear Sir:


Enclosed for filing is the following:

1. Original utility patent application for the invention by David Simpson, et al of a "Multi-Layer Stretch Cling Film" which includes:
 - a. specification;
 - b. 1 page of drawings;
 - c. declaration and power of attorney of the inventors
2. Original filing fee in the amount of \$461.00.
3. Statement Claiming Small Entity Status -Small Business Concern
4. Self-addressed return post card.

You are authorized to charge any deficiency or credit any overpayment associated with the filing of this application to Deposit Account 23-0035.

Very truly yours,

WADDEY & PATTERSON



Richard S. Myers, Jr.
Registration Number 42,022

RSM/mp
enclosures

Applicant or Patentee: David Simpson, et al.

Attorney's Docket No. N-4441

For: MULTI-LAYER STRETCH CLING FILM

**VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS
(37 CFR 1.9(f) & 1.27(c))—SMALL BUSINESS CONCERN**

I hereby declare that I am an officer of the small business concern identified below:

NAME OF SMALL BUSINESS CONCERN: Quintec Films

ADDRESS OF SMALL BUSINESS CONCERN: P.O. Box 459, 1624 Railroad Avenue,
Shelbyville, TN 37160

I hereby declare that the above identified small business concern qualifies as a small business concern as defined in 13 CFR 121.12, and reproduced in 37 CFR 1.9(d), for purposes of paying reduced fees to the United States Patent and Trademark Office, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention, entitled MULTI-LAYER STRETCH CLING FILM by inventors David Simpson, et al., described in the specification filed herewith.

If the rights held by the above identified small business concern are not exclusive, each individual, concern or organization having rights in the invention is listed below and no rights to the invention are held by any person, other than the inventor, who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d), or a nonprofit organization under 37 CFR 1.9(e).

There are no such persons, concerns, or organizations.

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date at which status as a small entity is no longer appropriate. (37 C.F.R. 1.28(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

SECRET 5006460

SIGNATURE  DATE 13 OCT 99

MULTILAYER STRETCH CLING FILM

FIELD OF THE INVENTION

The present invention relates to multi-layer stretch cling films having at least seven individual layers in the film composition offering acceptable cling performance, good balance of strength and good elongation properties.

BACKGROUND OF THE INVENTION

In commercial packaging art, individual articles as well as bundles of articles, including bundles of articles on pallets, are frequently packaged using so called stretch cling film in a stretch wrapping technique. In the stretch wrapping technique, a thin web of film is stretched and applied under tension around the articles to be wrapped or bundled. After wrapping is complete, the film attempts to relax and thus applies a compressive force on the bundled

articles prohibiting movement. It is desired that the stretch film have some inherent cling such that it will adhere to itself, and prevent relaxation back to its unstretched state so that the film will not unwrap and cause slippage of the stretched overlaid film layers.

5 As stated above, stretch wrap films are typically used in wrapping palletized loads of boxes, as well as individual boxes or articles such as furniture and the like. The stretch wrap films of the present invention may be applied various techniques such as by hand or may be applied using a mechanical apparatus specially designed to wrap pallets, for example. In one procedure for
10 using stretch wrap films of the present invention, the load to be wrapped is to be placed upon a platform, or turntable, which is made to rotate and in so doing, to take up stretch wrap film supplied from a continuous roll. Rotational speeds are typically 5 to 50 revolutions per minute. Regardless of the specific wrapping procedure used, at the completion of the wrapping, the stretch wrap
15 film is cut and attached to the underlying layer by cling, tack sealing, adhesive tape, spray adhesives, and the like. When the stretch film of the present invention is applied by hand, the operator typically holds an applicator or wrapping tool that holds the stretch wrap film roll. After the operator completes wrapping, the stretch wrap film is cut.

20 Mechanical properties that are important in stretch films include, for example, how far the film can be stretched (i.e., stretchability), the film's

resistance to stretching, film tensile strength, film puncture resistance, film tear resistance and cling force.

5

SUMMARY OF THE INVENTION

The present invention is a novel multi-layer stretch film comprising at least 7 layers and having excellent mechanical properties and stretch film performance when compared to stretch films made using fewer than seven layers.

10

The film comprises two outer, or skin layers that have moderate to high controlled cling and low blocking characteristics, at least five internal layers to assist in producing mechanical strength and stretchability. The resins used in the film composition include polypropylene (PP), ethylene propylene copolymers, low density polyethylene (LDPE), linear low density polyethylene (LLDPE), medium density polyethylene (MDPE), high density polyethylene (HDPE), metallocene-catalyzed polyethylene (mPE), very low density polyethylene (VLDPE), and/or ultralow density polyethylene (ULDPE). Also, at least two of the resins may be blended to achieve a desired range of physical or mechanical properties of the final film product. The blend ratios may range from 99:1 to 1:99. More preferably, the blend ratios range from 95:5 to 5:95. Even more preferably, the blend ratios range from 90:10 to 10:90.

15

20

5 In one embodiment of the invention, the multi-layer, thermoplastic stretch wrap film of the present invention comprises two outer layers, at least one of which having a cling performance of at least 100 grams/inch. The at least one outer layer is selected from the group consisting of linear low density polyethylene, very low density polyethylene, and ultra low density polyethylene resins, with the resins being homopolymers, copolymers, or terpolymers, of ethylene and alpha-olefins. Each of five inner layers are selected from the group consisting of linear low density polyethylene, very low density polyethylene, ultra low density polyethylene, and metallocene-catalyzed linear low density polyethylene resins, said resins being homopolymers, copolymers, or terpolymers, of ethylene and alpha-olefins.

BRIEF DESCRIPTION OF THE DRAWINGS

15 Figure 1: A five-layer film representative of the prior art. Each layer is designated with A, B, C, D, or E, with the respective percentages of weight and/or thickness of the layer with respect to the total weight and/or thickness indicated.

20 Figure 2: A seven-layer film constructed in accordance with the present invention. Each layer is designated with A, C₁, B, C₂, D, or C₃, with the

respective percentages of weight and/or thickness of the layer with respect to the total weight and/or thickness indicated.

5

DETAILED DESCRIPTION OF THE INVENTION

The present invention relates to a stretch film comprising seven layers. The stretch films of the present invention are typically produced by the blown film or the cast film process. Films of the present invention include film constructions represented by, for example, of A/B/C/D/E/F/G where the A and G layers may be the same or different polymer resins, at least one of which is used for cling performance and the A, B, C, D, E, F and G layers or any combinations of said layers may be the same or different polymer resins selected for specific film end-use properties; A/C/B/C/D/C/E where A and E layers may be the same or different polymer resins, at least one of which is used for cling performance and A, B, C, D, and E layers and any combinations of said layers may be the same or different polymer resins for specific film end-use properties; A/B/C/D/E/B/F where A and F layers may be the same or different polymer resins , at least one of which is used for cling performance and A, B, C, D, E, and F layers or any combinations of said layers may be the

same or different polymer resins selected for specific film end-use properties. Additionally, the films may be represented as A/B/C/D/C/B/A, or the like, wherein the same letter represents a layer of the same composition.

5

Outer Layers

The stretch wrap film of the present invention comprises two outer layers.

For acceptable stretch film performance, it is expected that at least one outer layer has a cling characteristic allowing it to adhere to an adjacent wrapping of film when applied to a unitized load. The use of polyethylene containing high hexane extractables (i.e., about >3.5% by weight, for example) in the outermost layers for cling is disclosed in, for example, U.S. Patent Numbers 5,617,707; 5,516,475; 5,273,809; and 5,273,809; all of which are incorporated herein by reference. Concerns for having high hexane extractables containing polymers in the outermost layers exist because the high hexane extractables are believed to contribute to the problem of die lip build-up during extrusion and a build-up of low molecular weight olefinic material on fabrication equipment. Die lip build-up is typically degraded low molecular weight polyethylene and is undesirable because build up on the die lip can cause die lines that are inherent weak spots in film. Die lip build-up can also be pulled from the die as the film is extruded, resulting in black or brown spots

in the film that can cause premature failure in film performance and are aesthetically unpleasing. A build-up of low molecular weight olefinic material is undesirable because the film surface may be negatively affected as the film is pulled through the fabrication equipment and may result in inconsistent cling performance.

Another concern with higher levels of hexane extractables is the contribution they make to film blocking on the roll. Films that contain resins with high levels of hexane extractables in the outermost layers can block while on the roll making the film difficult to remove resulting in holes and tears in the film prior to application. Therefore, in preferred embodiments of the present invention, the stretch wrap films have a hexane extractable level of less than about 3.5 % by weight.

Using a tackifying or cling agent such as polybutene, polyisobutylene, and the like are also known in the art as disclosed in U.S. Patent Numbers 5,569,693; 5,212,001; 5,175,049; 5,173,343; 5,154,981; 5,147,709; 5,141,809; 5,114,763; and 5,112,674; all of which are incorporated herein by reference. Using a cling agent adds to the cost of the final product, requires either preblending or alterations to production equipment to incorporate, and requires aging to bloom to the surface, all of which are negative aspects of its use.

It has also been disclosed that copolymers of ethylene and functional copolymers such as acrylates and vinyl acetate may be used as cling agents. For example, see U.S. Patents 5,212,001; 5,173,343; 5,154,981; 5,141,809; 5,112,674; and 5,049,423; all of which are incorporated herein by reference.

5 The copolymers of mention tend to be more expensive than conventional low density polyethylenes (LDPE) and linear low density polyethylenes (LLDPE) commonly used in stretch cling film formulations and tend to have lower ultimate elongations than LLDPE resins, all of which are negative aspects for their use. Thus, in a preferred embodiment of the present invention, no cling
10 additives are used in the films of the present invention.

When only one layer is used for cling performance, the stretch film of the present invention may be used as a differential cling film.

Suitable polyethylene resins for cling use are conventional linear low density polyethylene (LLDPE), very low density polyethylene (VLDPE), and
15 ultralow density polyethylene (ULDPE) resins which are homopolymers, copolymers, or terpolymers, of ethylene and alpha-olefins. In copolymers, the weight percentages of the alpha-olefin is about 4 to 15% by weight, preferably from 6 to 12% by weight and more preferably from 6 to 10% by weight.

Applicable alpha-olefin comonomers include propylene, 1-butene, 1-pentene, 1-
20 hexene, 4-methyl-1-pentene, 1-octene, and 1-octene. The alpha-olefins range from about C₃ to C₂₀, preferably C₃ to C₁₀, more preferably from C₃ to C₈. The

resin melt index will typically be between 0.2 and 10 dg/min, preferably between 1 and 5 dg/min, and more preferably between 2 and 4 dg/min. Resin density will be between 0.860 and 0.940g/cc density, preferably between 0.875 and 0.925 g/cc, and more preferably between 0.890 and 0.920 g/cc. If the LLDPE resins contain hexane extractables, it is desired that the hexane extractables levels be below approximately 3.5 weight percent to minimize potential for film blocking, high unwind noise, roll telescoping, roll softness and die lip build-up. Roll telescoping occurs when the outer layers of the roll film sag due to high lubricity of the hexane extractables resulting in a roll that is not as uniform. The outer layers used for cling performance will each be approximately 1 to 20 weight percent of the total film weight, preferably 2 to 15 weight percent of the total film weight, and more preferably 5 to 7 weight percent of the total film weight.

The resins that can be used in the outer layers may optionally contain known and conventional cling additives to supplement the inherent cling characteristics of at least one of the outer layers. Typical cling additives are discussed in U.S. Patent 5,922,441, incorporated herein by reference. However, in a preferred embodiment of the invention, cling additives are not used. At least one of the two outer layers used for cling performance has an inherent cling performance without additives of at least 100 g/inch.

Inner Layers

The inner five layers are used for mechanical strength and stretchability. It is preferred that the inner five layers are different one to the other in that at least two different polymer resins are used in any combination to make up the five layers.

Suitable polyethylene resins used for strength are conventional linear low density polyethylene (LLDPE), very low density polyethylene (VLDPE), ultralow density polyethylene (ULDPE) resins, and metallocene catalyzed linear low density polyethylene (mLLDPE) which are homopolymers, terpolymers, or copolymers of ethylene and alpha-olefins. In copolymers, the weight percentage of the alpha-olefins resins is about 4 to 15% by weight, preferably from 6 to 12% by weight and more preferably from 6 to 10% by weight. Applicable alpha-olefin comonomers include propylene, 1-butene, 1-pentene, 1-hexene, 4-methyl-1-pentene, and 1-octene. The alpha-olefins range from about C₃ to C₂₀, preferably C₃ to C₁₀, more preferably from C₃ to C₈.

The resin melt index is between about 0.5 and about 10 dg/min, preferably between 1 and 5 dg/min, and more preferably between 1 and 3 dg/min. Resin density will be between 0.860 and 0.940g/cc density, preferably between 0.875 and 0.925 g/cc, and more preferably between 0.890 and 0.920 g/cc.

Also suitable for use in the inner five layers for obtaining strength properties is low density polyethylene homopolymers (LDPE). For the low density polyethylene homopolymers, the resin melt index is between about 0.2 and about 10 dg/min, preferably between 0.2 and 5 dg/min, and more preferably between 0.2 and 3 dg/min. The resin density is between about 0.860 and about 0.940 g/cc density, preferably between 0.880 and 0.930 g/cc, and more preferably between 0.900 and 0.925 g/cc.

Additionally, at least one of the five inner layers comprise metallocene catalyzed polyethylene with a melt index of 0.5 to 5 dg/min, preferably 0.5 to 3 dg/min and a melt flow ratio of 16 to 80, preferably 16 to 50, wherein said at least one of said five inner layers comprise 5 to 80 weight percent of the total film composition.

As stated above, the multi-layer stretch films of the present invention are typically produced by the blown film or cast film process. The blown or cast film is formed by extrusion. The extruder is a conventional one using a die, which will provide the desired gauge. Some useful extruders are described in US Patent numbers 4,814,135; 4,857,600; 5,076,988; 5,153,382; each of which are incorporated herein by reference. The gauge of the films of interest here can be in the range of about 0.3 to about 10 mils, preferably from about 0.5 to about 10 mils, and more preferably in the range of about 0.7 to about 2

65401-60057450
mils. Examples of various extruders, which can be used in producing the film
of the present invention, are the single screw type modified with a blown film
die and air ring and continuous take off equipment. A typical single screw type
extruder can be described as one having a hopper at its upstream end and a
5 die at its downstream end. The hopper feeds into a barrel, which contains a
screw. At the downstream end, between the end of the screw and the die, is a
screen pack and a breaker plate. The screw portion of the extruder is
considered to be divided into three sections: the feed section, the compression
section, and the meeting section. Multiple heating zones are present from the
10 rear heating zone to the front heating zone, the multiple sections and zones
running from upstream to downstream. If it has more than one barrel, the
barrels are preferably connected in series. The length to diameter ratio of each
barrel is in the range of about 16:1 to about 30:1. The extrusion can take place
at temperatures in the range of about 160 to about 270 degrees Celsius, and is
15 preferably carried out at temperatures in the range of about 180 to about 240
degrees Celsius.

Conventional blown and cast film processes are described in
Fundamentals of Polymer Processing, Stanley Middleman, McGraw Hill, 1977;
Polymer Extrusion, Chris Rauwendall, Hanser Publishers, 1986; and The
20 Encyclopedia of Chemical Technology, Kirk-Othmer, John-Wiley and Sons,
1981; each of which are incorporated herein by reference.

When being applied to an article or pallet, the stretch wrap film of the present invention typically will be stretched to at least 150 to 350% of its original length, with the most common range being 200-250%.

The melt index of the layers of the films of the present invention is determined under ASTM D-1238, Condition E. It is measured at 190 degrees Celsius and 2.16 kilograms and reported as grams per 10 minutes. Flow index is determined under ASTM D-1238, Condition F. It is measured at 190 degrees Celsius and 10 times the weight used in determining the melt index, and reported as grams per 10 minutes. Melt flow ratio (MFR) is the ratio of flow index to melt index. It is understood by those skilled in the art that the lower the melt index or flow index, the higher the molecular weight. In the films of the present invention, the melt flow index range is typically from 0.2 to 10, preferably from 0.2 to 5, and more preferably from 0.2 to 3.

In another embodiment of the present invention, the stretch wrap film of the present invention may be used as a differential cling stretch wrap film. That is, the stretch wrap films of the present invention may comprise films whereby one outer layer has superior cling characteristics when applied in its stretched state and the other outer layer does not have superior cling characteristics. These types of films are commonly referred to as differential cling stretch wrap films or cling/slip films. Such a film may be advantageous when several pallets or articles wrapped with stretch film are loaded beside other wrapped articles.

The outer layer of the film wrapping a stored or loaded pallet or article (sometimes called the "slip" layer) does not have superior cling characteristics, and therefore does not cling to an adjacent pallet or article. Therefore, chances of tearing of the stretch wrap film are reduced.

5 An example of an outer "slip" or differential cling layer is the outer slip layer of US Patent 5,922,441 incorporated herein by reference. That is, the outer slip layer may be constructed of various resin materials suitable for such purposes. Examples of such resins include polyolefin resins and copolymers of polyolefins such as polyethylene, polypropylene, and combinations thereof.

10 Suitable polymer resins additionally include copolymers of polyethylene with minor amounts of other C₄₋₁₀ olefins, particularly C₆₋₈ polyolefins. Preferred polyethylenes include HPLDPE resins having a density of from about 0.92 to about 0.94 g/cm³, and a melt index (I₂) of from about 1.0 to about 4.0 g/10 min., and LLDPE resins having a density of from about 0.925 to about 0.945 g/cm³, and a melt index of from about 2.0 to about 5.0 g/10 min. Preferred

15 polymers include polypropylenes, preferably isotactic, having a density of from about 0.89 to about 0.91 g/cm³, and a melt index (I₂) of from about 5 to about 25 g/10 min. as determined by ASTM D1238.

20 The outer slip layer may include any of several anti-cling, slip or anti-block additives to improve the slip characteristics of the layer. Such additives include silicas, talcs, diatomaceous earth, silicates, lubricants, etc. These

additives are generally blended with the resin material in an amount of from about 100 to about 20,000 ppm. When an outer slip layer is present in the stretch wrap film, an outer high cling layer as described above will be located as an opposing layer.

5 The overall properties of the stretch wrap film of the present invention are such that they have a cling force at 0% elongation of about 100 grams to about 300 grams as measured according to ASTM D5458.

10 Additionally, they have a relatively high puncture resistance as measured by the F-50 dart drop test procedure (ASTM D1709). It is the experience of those skilled in the art that the F-50 dart drop test is well correlated to the end use puncture resistance of stretch wrap films. The F-50 dart drop of a stretch wrap film is at least 75 to 200 g/mil.

15 The stretch wrap films of the present invention preferably have a overall transverse direction tear resistance (TD tear), as determined by ASTM D1922 of at least about 400 to about 700 g/mil and MD Elmendorf tear of at least about 50 g/mil to about 350 g/mil.

20 In other embodiments of the present invention, the multi-layer, thermoplastic stretch wrap film of the present invention has a MD tensile elongation (%) of 400 to 700, a TD tensile elongation (%) of 600 to 900, a MD Elmendorf tear (g/mil) of 200 to 400, a TD Elmendorf tear (g/mil) of 450 to 700, and a dart impact (g) of from 100 to 300.

The stretch wrap films of the present invention are capable of being stretched from at least about 100% to about 400% of their original lengths, preferably about 150% to about 300%.

The overall thickness of the stretch wrap film of the present invention can vary widely depending upon the particular end use as determined by one of ordinary skill in the art, but the thickness is generally in the range of the typical thickness for stretch wrap films. Thus, the thickness is not known to be critical and can be easily adjusted by one of ordinary skill in the art to fit the appropriate end use. Conventional for such films is a thickness of from about 0.4 to about 3 mils, and the application is specific.

The individual layers, described as percentages by weight independent of thickness, vary from about 1% to about 30% of the total thickness of the film. The two outer layers are typically from 1 to 20% each, preferably from 2 to 10% each, more preferably from 5 to 7% each, regardless of the presence of a differential cling layer. The thickness the inner layers is typically from about 5 to 28%.

For example, the seven polymeric layers may be represented by the formula A/C/B/C/D/C/E, wherein the relative composition of the layers is 10/20/10/20/10/20/10 in % thickness and/or parts by weight. Also, the seven polymeric layers may be represented by the formula A/C/B/C/D/C/E,

wherein the relative composition of the layers is 7/24/7/24/7/24/7 in % thickness and/or parts by weight.

In one embodiment of the present invention, the multi-layer, thermoplastic stretch wrap film of comprises seven polymeric layers are

5 represented by the following formula: A/C/B/C/D/C/E, wherein

A represents :

a C₂/C₄/C₆ very low density polyethylene terpolymer with a melt index of 2.5 dg/min and a resin density of 0.910 g/cc, with a thickness of 2% of the total thickness of said stretch wrap film, or

10 a C₂/C₆ linear low density polyethylene copolymer blended with a C₂/C₃ copolymer to form a polymer with a melt index of 2.5 dg/min and a resin density of 0.915 , with a thickness of 5% of the total thickness of the stretch wrap film;

B and D represent:

15 a C₂/C₆ metallocene catalyzed copolymer resin with a melt index of 1 or 2.5 dg/mm and a resin density of 0.910 g/cc and a melt flow ratio of 16-20 g/10 min; wherein D and D have a thickness of 7 to 10% of the total thickness of the stretch wrap film;

C represents :

20 a C₂/C₆ linear low density polyethylene copolymer with a melt index of 2 dg/mm and a resin density of 0.917 g/cc, or

a C₂/C₆ linear low density polyethylene copolymer with a melt index of 2 dg/mm and a resin density of 0.917 g/cc blended with a low density polyethylene homopolymer with a melt index of 0.2 to 2 dg/mm at a ratio of 95:5 to 75:25; wherein C has a thickness of 60 to 81% of the total thickness of the stretch wrap film; and

E represents:

a C₂/C₄ linear low density polyethylene copolymer with a melt index of 2 dg/mm, or

a C₂/C₆ linear low density polyethylene copolymer with a melt index of 3 dg/mm and a resin density of 0.917 g/cc, wherein E has a thickness of 5 to 10% of the thickness of the stretch wrap film.

In another embodiment of the present invention, the seven polymeric layers are represented by the following formula: A/C/B/C/D/C/E, wherein

A represents:

a C₂/C₄/C₆ very low density polyethylene terpolymer with a melt index of 2.5 dg/min and a resin density of 0.910 g/cc, with a thickness of 2% of the total thickness of said stretch wrap film, or

a C₂/C₆ linear low density polyethylene copolymer blended with a C₂/C₃ copolymer to form a polymer with a melt index of 2.5 dg/min and a resin density of 0.915, with a thickness of 5% of the total thickness of the stretch wrap film;

B and D represent:

a C₂/C₆ metallocene catalyzed resin copolymer with a melt index of 1 dg/mm and a resin density of 0.917 g/cc and a melt flow ratio of 16-20 g/10 min; wherein B and D have a thickness of 7 to 10% of the total thickness of the stretch wrap film;

C represents:

a blend of a C₂/C₆ linear low density polyethylene copolymer with a melt index of 1 dg/mm and a low density polyethylene with a melt index of 2 dg/mm in a ratio of 95:5 to 75:25; wherein C has a thickness of 60 to 81% of the total thickness of the stretch wrap film; and

E represents:

a C₂/C₄ linear low density polyethylene copolymer with a melt index of 2 dg/mm, or

a C₂/C₆ linear low density polyethylene copolymer with a melt index of 3 dg/mm and a resin density of 0.917 g/cc, wherein E has a thickness of 5 to 10% of the thickness of the stretch wrap film.

In yet another embodiment of the present invention, the seven polymeric layers are represented by the following formula: A/C/B/C/D/C/E, wherein

A and E represent:

a C₂/C₄ linear low density polyethylene copolymer with a melt index of 2 dg/min and a resin density of 0.910 g/cc, with a thickness of 5 to 10% each of the total thickness of said stretch wrap film,

B and D represent:

5 a C₂/C₆ linear low density polyethylene copolymer resin with a melt index of 2 dg/mm and a resin density of 0.910 g/cc, with a thickness of 7 to 10% of the total thickness of the stretch wrap film; and

C represents:

10 a blend of a C₂/C₄ linear low density polyethylene copolymer with a melt index of 2 dg/mm and a density of 0.910 g/cc, with a thickness of 60 to 81% each of the total thickness.

The following example is given for illustration of the invention and is not intended to be limiting thereof.

Example

This example demonstrates the advantage of films of the present invention that contain seven layers over films containing five layers.

15 A five layer film with a layer configuration of A/B/C/B/A with relative compositions of these layers being 10/10/60/10/10 parts by weight are prepared on a cast film line with layer A and layer B extruders having barrel diameters of 1.5 inches with L/D 30:1 and layer C extruder having a barrel

66EPT-5006760
diameter of 3 inches and L/D of 30:1. Extrusion melt temperatures are
between 500 and 575°F with output rates set to give film production line
speeds of approximately 1000 feet/min. Resins used to produce a five-layer
film sample are as follows: A is a nominal 3.2 dg/min melt index, 0.917 g/cc
5 density gas-phase produced hexene copolymer LLDPE; B is a nominal 2.5
dg/min melt index, 0.917 g/cc density gas-phase produced hexene copolymer
metallocene catalyzed LLDPE; and C is a nominal 2.0 dg/min melt index, 0.917
g/cc density gas-phase produced hexene-copolymer LLDPE.

The inventive example is a seven-layer film with a layer configuration of
10 A/C/B/C/D/C/E, with relative compositions of these layers of
10/20/10/20/10/20/10 parts by weight. The inventive example is prepared on
a cast film line with A, B, D, and E extruders having barrel diameters of 2.5
inches and L/D of 30:1; and C extruder having a barrel diameter of 6 inches
with L/D of 30:1. Extrusion melt temperatures are between 500 and 575°F
15 with output rates set to give film production line speeds of approximately 1000
feet/min. A and E are a nominal 3.2 dg/min melt index, 0.917 g/cc density
gas-phase produced hexene-copolymer LLDPE, B and D are a nominal 2.5
dg/min melt index, 0.917 g/cc density gas-phase produced hexene copolymer
metallocene catalyzed LLDPE; and C is a nominal 2.0 dg/min melt index, 0.917
20 g/cc density gas-phase produced hexene-copolymer LLDPE.

Film properties are tested according to ASTM procedures. Table 1 indicates the mechanical properties advantages found using seven film layers compared to five layer films.

Property	ASTM Method	5-layer Film	7-layer Film
Film Thickness (mil)		0.8	0.8
MD Tensile Elongation (%)	D882	470	650
TD Tensile Elongaion (%)	D882	670	770
MD Elmendorf Tear (g/mil)	D1922	230	320
TD Elmendorf Tear (g/mil)	D1922	560	580
Dart Impact (g)	D1709	140	160

As is demonstrated by the above table, film made according to the invention has higher elongation and better toughness than a film made with a similar polymer resin having less than seven layers.

5

The invention thus being described, it will be obvious that the same may be varied in many ways. Such variations are not regarded as a departure from the spirit and scope of the present invention, and all such modifications as

would be obvious to one of ordinary skill in the art are intended to be included within the scope of the following claims.

We claim:

1. A multi-layer, thermoplastic stretch wrap film containing seven polymeric layers, comprising:

(a) two outer layers, at least one of which having a cling performance of at least 100 grams/inch, said outer layer being selected from the group consisting of linear low density polyethylene, very low density polyethylene, and ultra low density polyethylene resins, said resins being homopolymers, copolymers, or terpolymers, of ethylene and alpha-olefins; and

(b) five inner layers, with each layer being selected from the group consisting of linear low density polyethylene, very low density polyethylene, ultra low density polyethylene, and metallocene-catalyzed linear low density polyethylene resins, said resins being homopolymers, copolymers, or terpolymers, of ethylene and alpha-olefins.

2. The multi-layer, thermoplastic stretch wrap film of claim 1, wherein said alpha olefins are propylene, 1-butene, 1-pentene, 1-hexene, 4-methyl-1-pentene, or 1-octene and range from C₃ to C₂₀.

3. The multi-layer, thermoplastic stretch wrap film of claim 1, wherein no cling additives are present in said stretch wrap film.

4. The multi-layer, thermoplastic stretch wrap film of claim 2,
wherein said alpha-olefins range from C₃ to C₈.

5. The multi-layer, thermoplastic stretch wrap film of claim 1,
5 wherein said copolymers has an alpha-olefin weight percentage of 4 to 15% by
weight.

6. The multi-layer, thermoplastic stretch wrap film of claim 1,
wherein, wherein the resin melt index for each outer layer is 0.2 to 10 dg/min.

7. The multi-layer, thermoplastic stretch wrap film of claim 1,
wherein, wherein the resin melt index for each inner layer is 0.5 to 10 dg/min.

8. The multi-layer, thermoplastic stretch wrap film of claim 1,
15 wherein the resin density for each layer is about 0.860 to 0.940.

9. The multi-layer, thermoplastic stretch wrap film of claim 1,
wherein the hexane extractable level is below 3.5 weight percent.

20 10. The multi-layer, thermoplastic stretch wrap film of claim 1,
wherein the outer layers are 5 to 7 weight percent of the total film weight.

11. The multi-layer, thermoplastic stretch wrap film of claim 1,
wherein at least one said inner layer comprises low density polyethylene
homopolymers, wherein said low density polyethylene homopolymers have a
melt index of between about 0.2 to 10 dg/min; and a resin density of between
about 0.86 to 0.94 g/cc.

12. The multi-layer, thermoplastic stretch wrap film of claim 1, which
further comprises one outer layer with substantially no inherent cling
characteristics.

13. The multi-layer, thermoplastic stretch wrap film of claim 1,
wherein the cling force at 0% elongation is about 100 grams to 300 grams as
measured according to ASTM D5458.

14. The multi-layer, thermoplastic stretch wrap film of claim 1,
wherein the transverse directional tear resistance is at least about 400 to 700
g/mil as determined by ASTM D1922 and a MD Elmendorf tear resistance of
at least about 50 g/mil to 350 g/mil.

15. The multi-layer, thermoplastic stretch wrap film of claim 1,
wherein said outer layers have a thickness of 5 to 7% each of the total
thickness of the film, and

said five inner layers have a thickness of 5 to 28% each of the total
5 thickness of the film.

16. The multi-layer, thermoplastic stretch wrap film of claim 1,
wherein said seven polymeric layers are represented by the following formula:
A/C/B/C/D/C/E, wherein the relative composition of the layers is
10/20/10/20/10/20/10, % thickness and/or parts by weight, respectively,
with A and E representing a linear low density polyethylene hexene-copolymer,
B and D representing a metallocene catalyzed linear low density polyethylene
copolymer, and C represents a linear low density polyethylene hexene-
copolymer.

17. The multi-layer, thermoplastic stretch wrap film of claim 16,
wherein layers A and E have a melt index of 3.2 dg/min and a density of 0.917
g/cc; layers B and D have a melt index of 2.5 dg/min and a density of 0.917
g/cc; and layer C has a melt index of 2.0 dg/min and a density of 0.917 g/cc.

18. The multi-layer, thermoplastic stretch wrap film of claim 1,
wherein said stretch wrap film has a MD tensile elongation (%) of 400 to 700, a
TD tensile elongation (%) of 600 to 900, a MD Elmendorf tear (g/mil) of 200 to
400, a TD Elmendorf tear (g/mil) of 450 to 700, and a dart impact (g) of from
5 100 to 300.

19. The multi-layer, thermoplastic stretch wrap film of claim 1,
wherein said seven polymeric layers are represented by the following formula:
A/C/B/C/D/C/E, wherein

A represents :

a C₂/C₄/C₆ very low density polyethylene terpolymer with a melt
index of 2.5 dg/min and a resin density of 0.910 g/cc, with a thickness of 2%
of the total thickness of said stretch wrap film, or

a C₂/C₆ linear low density polyethylene copolymer blended with a
15 C₂/C₃ copolymer to form a polymer with a melt index of 2.5 dg/min and a resin
density of 0.915 , with a thickness of 5% of the total thickness of the stretch
wrap film;

B and D represent:

a C₂/C₆ metallocene catalyzed copolymer resin with a melt index of 1 or
20 2.5 dg/mm and a resin density of 0.910 g/cc and a melt flow ratio of 16-20

g/10 min; wherein D and D have a thickness of 7 to 10% of the total thickness of the stretch wrap film;

C represents :

a C₂/C₆ linear low density polyethylene copolymer with a melt index of 2 dg/mm and a resin density of 0.917 g/cc, or

a C₂/C₆ linear low density polyethylene copolymer with a melt index of 2 dg/mm and a resin density of 0.917 g/cc blended with a low density polyethylene homopolymer with a melt index of 0.2 to 2 dg/mm at a ratio of 95:5 to 75:25; wherein C has a thickness of 60 to 81% of the total thickness of the stretch wrap film; and

E represents:

a C₂/C₄ linear low density polyethylene copolymer with a melt index of 2 dg/mm, or

a C₂/C₆ linear low density polyethylene copolymer with a melt index of 3 dg/mm and a resin density of 0.917 g/cc, wherein E has a thickness of 5 to 10% of the thickness of the stretch wrap film.

20. The multi-layer, thermoplastic stretch wrap film of claim 1, wherein said seven polymeric layers are represented by the following formula:

A/C/B/C/D/C/E, wherein

A represents:

a C₂/C₄/C₆ very low density polyethylene terpolymer with a melt index of 2.5 dg/min and a resin density of 0.910 g/cc, with a thickness of 2% of the total thickness of said stretch wrap film, or

a C₂/C₆ linear low density polyethylene copolymer blended with a C₂/C₃ copolymer to form a polymer with a melt index of 2.5 dg/min and a resin density of 0.915 , with a thickness of 5% of the total thickness of the stretch wrap film;

B and D represent:

a C₂/C₆ metallocene catalyzed copolymer resin with a melt index of 1 dg/mm and a resin density of 0.917 g/cc and a melt flow ratio of 16-20 g/10 min; wherein B and D have a thickness of 7 to 10% of the total thickness of the stretch wrap film;

C represents:

a blend of a C₂/C₆ linear low density polyethylene copolymer with a melt index of 1 dg/mm and a low density polyethylene with a melt index of 2 dg/mm in a ratio of 95:5 to 75:25; wherein C has a thickness of 60 to 81% of the total thickness of the stretch wrap film; and

E represents:

a C₂/C₄ linear low density polyethylene copolymer with a melt index of 2 dg/mm, or

a C₂/C₆ linear low density polyethylene copolymer with a melt index of 3 dg/mm and a resin density of 0.917 g/cc, wherein E has a thickness of 5 to 10% of the thickness of the stretch wrap film.

5 21. The multi-layer, thermoplastic stretch wrap film of claim 1, wherein said seven polymeric layers are represented by the following formula: A/C/B/C/D/C/E, wherein

A and E represent:

10 a C₂/C₄ linear low density polyethylene copolymer with a melt index of 2 dg/min and a resin density of 0.910 g/cc, with a thickness of 5 to 10% each of the total thickness of said stretch wrap film,

B and D represent:

15 a C₂/C₆ linear low density polyethylene copolymer resin with a melt index of 2 dg/mm and a resin density of 0.910 g/cc, with a thickness of 7 to 10% of the total thickness of the stretch wrap film; and

C represents:

20 a blend of a C₂/C₄ linear low density polyethylene copolymer with a melt index of 2 dg/mm and a density of 0.910 g/cc, with a thickness of 60 to 81% each of the total thickness.

22. The multi-layer, thermoplastic stretch wrap film of claim 1, wherein at least one of said five inner layers comprise metallocene catalyzed

polyethylene with a melt index of 0.5 to 5 dg/min and a melt flow ratio of 30 to 50 g/10 min, wherein said at least one of said five inner layers comprise 5 to 80 weight percent of the total film composition.

5 23. The multi-layer, thermoplastic stretch wrap film of claim 1, wherein the dart impact as measured by the F-50 dart drop test procedure is at least 75 to 200 g/mil.

10 24. The multi-layer, thermoplastic stretch wrap film of claim 1, wherein the melt flow index is between 0.2 and 10.

15 25. The multi-layer, thermoplastic stretch wrap film of claim 1, wherein at least one layer contains blends of at least two of said resins.

20 26. The multi-layer, thermoplastic stretch wrap film of claim 1, wherein said seven polymeric layers are represented by the following formula:
A/C/B/C/D/C/E, wherein the relative composition of the layers is
7/24/7/24/7/24/7, % thickness and/or parts by weight, respectively, with A
and E representing a linear low density polyethylene hexene-copolymer, B and
D representing a metallocene catalyzed linear low density polyethylene

copolymer, and C represents a linear low density polyethylene hexene-copolymer.

27. The multi-layer, thermoplastic stretch wrap film of claim 1,
5 wherein the resin density for each layer is about 0.880 to 0.930.

28. The multi-layer, thermoplastic stretch wrap film of claim 1,
wherein the resin density for each layer is about 0.900 to 0.925.

29. A multi-layer, thermoplastic stretch wrap film containing seven
10 polymeric layers, comprising:

(a) two outer layers, at least one of which having a cling performance of
at least 100 grams/inch, said outer layer being selected from the group
consisting of linear low density polyethylene, very low density polyethylene, and
15 ultra low density polyethylene resins, said resins being homopolymers,
copolymers, or terpolymers, of ethylene and alpha-olefins; and

(b) five inner layers, with each layer being selected from the group
consisting of linear low density polyethylene, very low density polyethylene,
ultra low density polyethylene, and metallocene-catalyzed linear low density
20 polyethylene resins, said resins being homopolymers, copolymers, or
terpolymers, of ethylene and alpha-olefins,

wherein at least one of said inner layers comprises a metallocene catalyzed linear low density polyethylene resin with a melt index of 0.5 to 3 dg/min and a melt index ratio of 16 to 80.

ABSTRACT

A novel multi-layer stretch film comprising at least 7 layers and having excellent mechanical properties and stretch film performance, comprising two outer, or skin layers that have moderate to high controlled cling and low blocking characteristics, and at least five internal layers to assist in producing mechanical strength and stretchability. The resins used in the film composition include polypropylene (PP), ethylene propylene copolymers, low density polyethylene (LDPE), linear low density polyethylene (LLDPE), medium density polyethylene (MDPE), high density polyethylene (HDPE), metallocene-catalyzed polyethylene (mPE), very low density polyethylene (VLDPE), and/or ultralow density polyethylene (ULDPE). The resins also may be blended to achieve a desired range of physical or mechanical properties of the final film product.

Figure 1

Prior Art


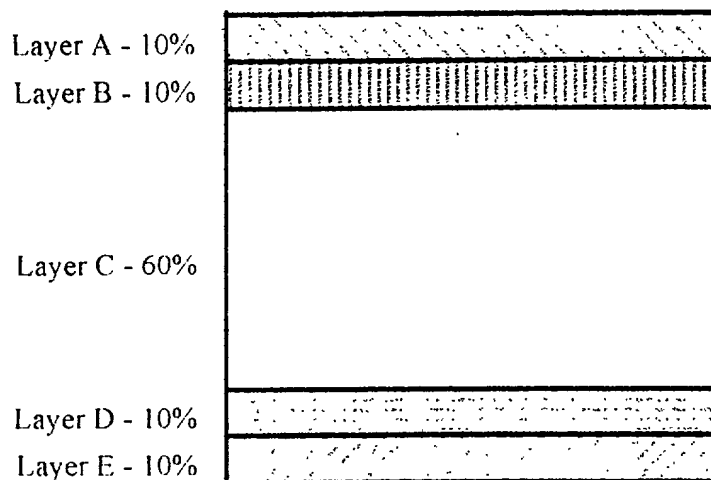


Figure 2

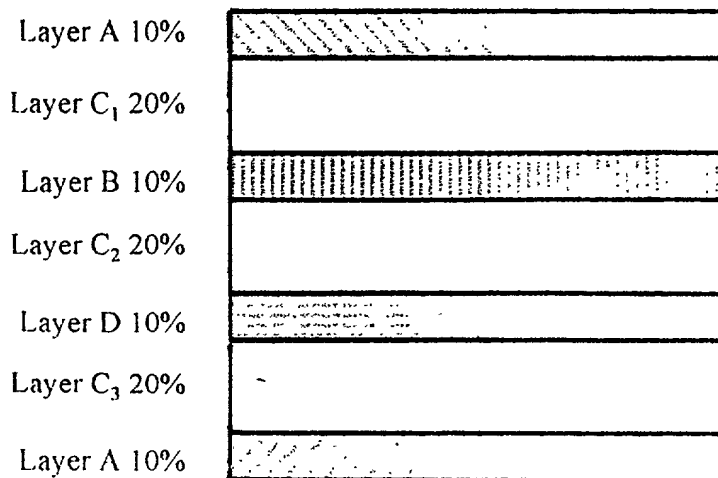

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name; that

I believe I am an original, first and joint inventor of the invention entitled "MULTI-LAYER STRETCH CLING FILM" described and claimed in the attached specification.

I have reviewed and understand the contents of the specification, including the claims, in the above-referenced application, as amended by any amendment specifically referred to in the Declaration.

I acknowledge my duty pursuant to 37 C.F.R. §1.56 to disclose information of which I am aware which is material to the patentability of this application.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

None.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that

SECRET-50057460

willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

I hereby appoint the following attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Mark J. Patterson (Reg. No. 30,412)
I. C. Waddey, Jr. (Reg. No. 25,180)
Edward D. Lanquist, Jr. (Reg. No. 33,729)
Lucian Wayne Beavers (Reg. No. 28,183)
John C. Garvin, Jr. (Reg. No. 20,542)
Laura K. Thomas (Reg. No. 39,856)
Emily A. Shouse (Reg. No. 44,336)
David B. Pieper (Reg. No. 42,998)
Richard S. Myers, Jr. (Reg. No. 42,022)
414 Union Street, Suite 2020
Bank of America Plaza
Nashville, TN 37219
(615) 242-2400

Address all telephone calls to Richard S. Myers, Jr. at telephone number (615) 242-2400.

Address all correspondence to:

Richard S. Myers, Jr.
Waddey & Patterson
414 Union Street, Suite 2020
Bank of America Plaza
Nashville, TN 37219

Full name of Inventor:

David Simpson

Inventor's signature:

A handwritten signature in black ink, appearing to read "David Simpson", written over a horizontal line.

13 OCT 99

Date

Residence:

1719 Joben Drive
Murfreesboro, TN 37128

Citizenship:

United States


Post Office Address:

1719 Joben Drive
Murfreesboro, TN 37128

Full name of Inventor:

Terry Jones

Inventor's signature:



10-13-99

Date

Residence:

439 Royal Glen Blvd.
Murfreesboro, TN 37128

Citizenship:

United States

Post Office Address:

439 Royal Glen Blvd.
Murfreesboro, TN 37128

666707-60067450